

Version : 05/2024

**product description**

		Herringbone	XL	XXL long
Bevel	-	4	2	2
Oak facing thickness (+0/-0,1)	mm	0,6		
Class of use	-	20 years		
Residential use guarantee	ISO 10874	23 (heavy domestic use) 33 (heavy commercial use)		
Residential use guarantee	mm	9,5	10	10
Total weight	kg / m <sup>2</sup>	TBD	8,5	8,5
Format	mm	84 x 504	185 x 1190	210 x 2200
Pack content	m <sup>2</sup> / packs	20 planks (6.22 kg, 0.846 m <sup>2</sup> )	10 planks (18.7 kg, 2.20 m <sup>2</sup> )	6 planks (23.7 kg, 2.77 m <sup>2</sup> )
Pallet content	-	48 packs	40 packs	40 packs
Pallet size	hxlxl / mm	732 x 1200x 815	950 x 960 x 1200	750 x 960 x 2250

**tests results**


Moisture level	-	7 - 10%		
Installation system	-	OmniLoc locking system	BestLoc X-Treme, à plat, sans colle, sans outils ou collé en plain	
Surface treatment	-	Vernis Ultimtec haute performance		
Resistance to abrasion	XP B 53-669	+ 15 000 Tour (TT CS10)		
Gloss level	Gloss 60	5+/-2 (mat)		
Compatibility with underfloor heating	-	Compatible PRE (maxi 90 W/m <sup>2</sup> ) et eau chaude basse température (voir conditions)		
Thermal resistance	m <sup>2</sup> .K/W	0,055	0,052	
Fire resistance	EN 13 501-1 (chêne)	Cfl-s1		
CE marking	EN 14342	CE		
Formaldehyde emissions	EN 717-1	E1		
Formaldehyde emissions	ISO 16 000-9	M1 / A	M1 / A+	
Envrionmental programme	Certification	PEFC/07-31-229	PEFC/10-31-1047	




**strong wood floors.**



Version : 05/2024

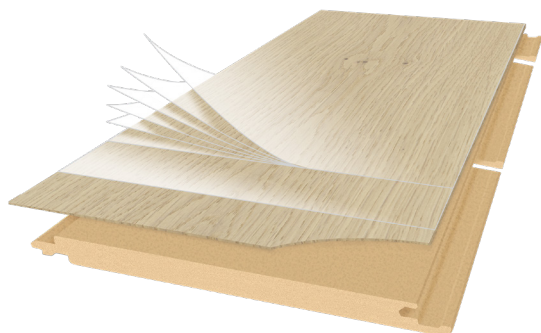

## **parqwood xl & xxl long**

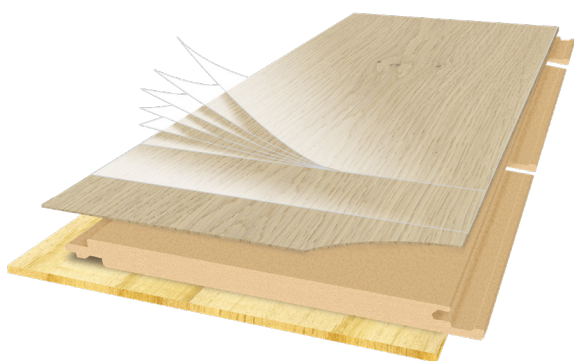

## **parqwood herringbone**

**strong wood floors.**